


## Unatherm Systems PRO5 PE-RT Type I 5-layer pipe

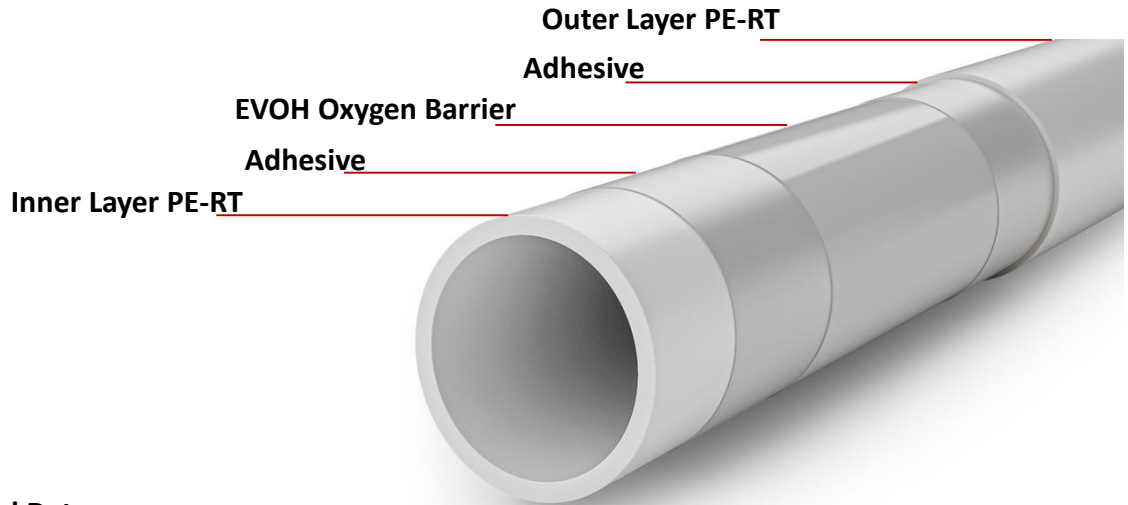

### Technical Data

Max. Permanent Temperature Load	70 °C
Max. Temperature Load	95 °C
Max. Operating Pressure at 70 °C	6 bar
Application Classes	4/5
Diffusion Barrier	EVOH

### Specifications

Dimensions	14 x 2mm, 16 x 2mm, 17 x 2mm, 20 x 2mm
Maximum Coil Length	600m
Exterior Color	Transparent, Custom Colors on Request
Imprint	Customer Specific
Packaging	Cardboard box or stretch wrapped on pallet

### Approvals/ Standards

Oxygen Tightness	DIN 4726
Production Standards	DIN16833 and DIN EN ISO 22391
Approvals	SKZ A 240
Application	Underfloor/wall heating, ceiling cooling